


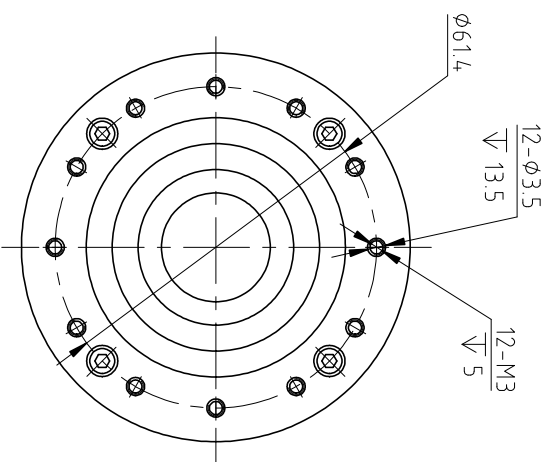

Leitua

FHD-20-XX-U-III

Model	Reduction ratio	Rated torque at 2000r/min Input		Permissible peak torque at start and stop		Permissible maximum value for average load torque		Permissible maximum momentary torque		Permissible maximum input rotational speed		Permissible average input rotational speed		Backlash	weight	Desian life
		Nm	kgfm	Nm	kgfm	Nm	kgfm	Nm	kgfm	r/min	r/min	Arc Sec	kg			
20	50	17	1.7	39	4	24	2.4	69	7	6500	3500	≤20			≥9000	
	80	24	2.4	51	5.2	33	3.4	89	9.1	6500	3500	≤20	FHD-III:0.54		≥10000	
	100	28	2.9	57	5.8	34	3.5	95	9.7	6500	3500	≤20			≥10000	