
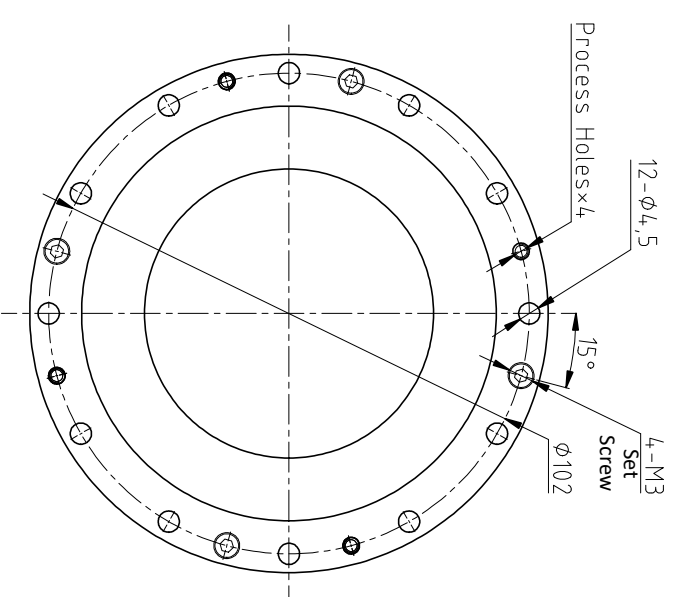
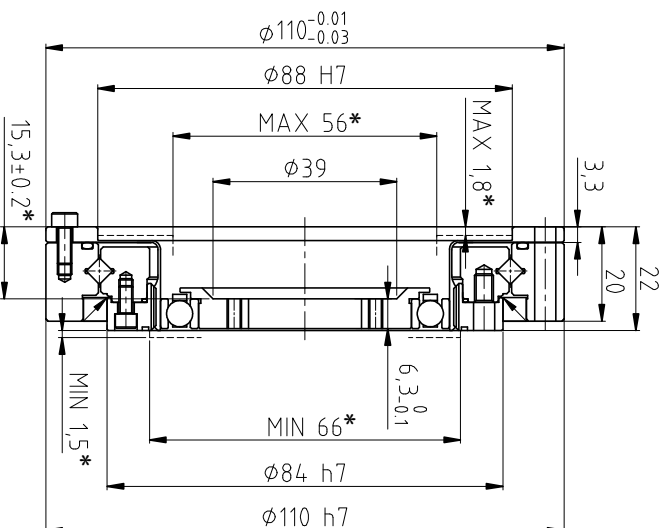


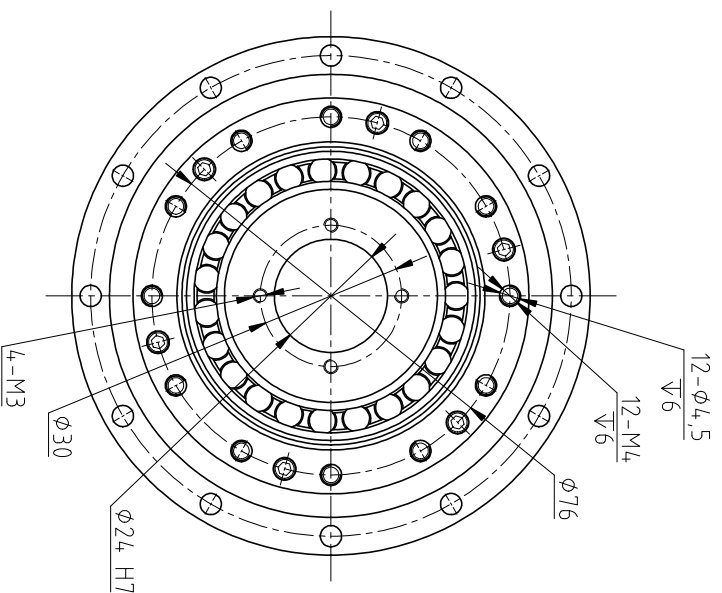

Technical requirements:

1. Please use the grease specified by our company
2. The * in the drawing is the installation reference size, please follow the installation size requirements.
3. If the product performance parameters are not specified, please refer to the latest catalog of our company for the standard values.

Model	Reduction ratio	Rated torque at 2000r/min input		Permissible peak torque at start and stop		Permissible maximum value for average load torque		Permissible maximum momentary torque		Permissible maximum input rotational speed		Permissible average input rotational speed		Backlash Arc Sec	weight kg	Desian life Hour
		Nm	kgfm	Nm	kgfm	Nm	kgfm	Nm	kgfm	r/min		r/min				
FHD-25-XX-U-1	50	27	2.8	69	7	38	3.9	127	13	5600		3500		≤20	FHD-I:0.95	≥9000
	80	44	4.5	96	9.8	60	6.1	179	18	5600		3500		≤20		≥10000
	100	47	4.8	110	11	75	7.6	184	19	5600		3500		≤20		≥10000

Laitural