



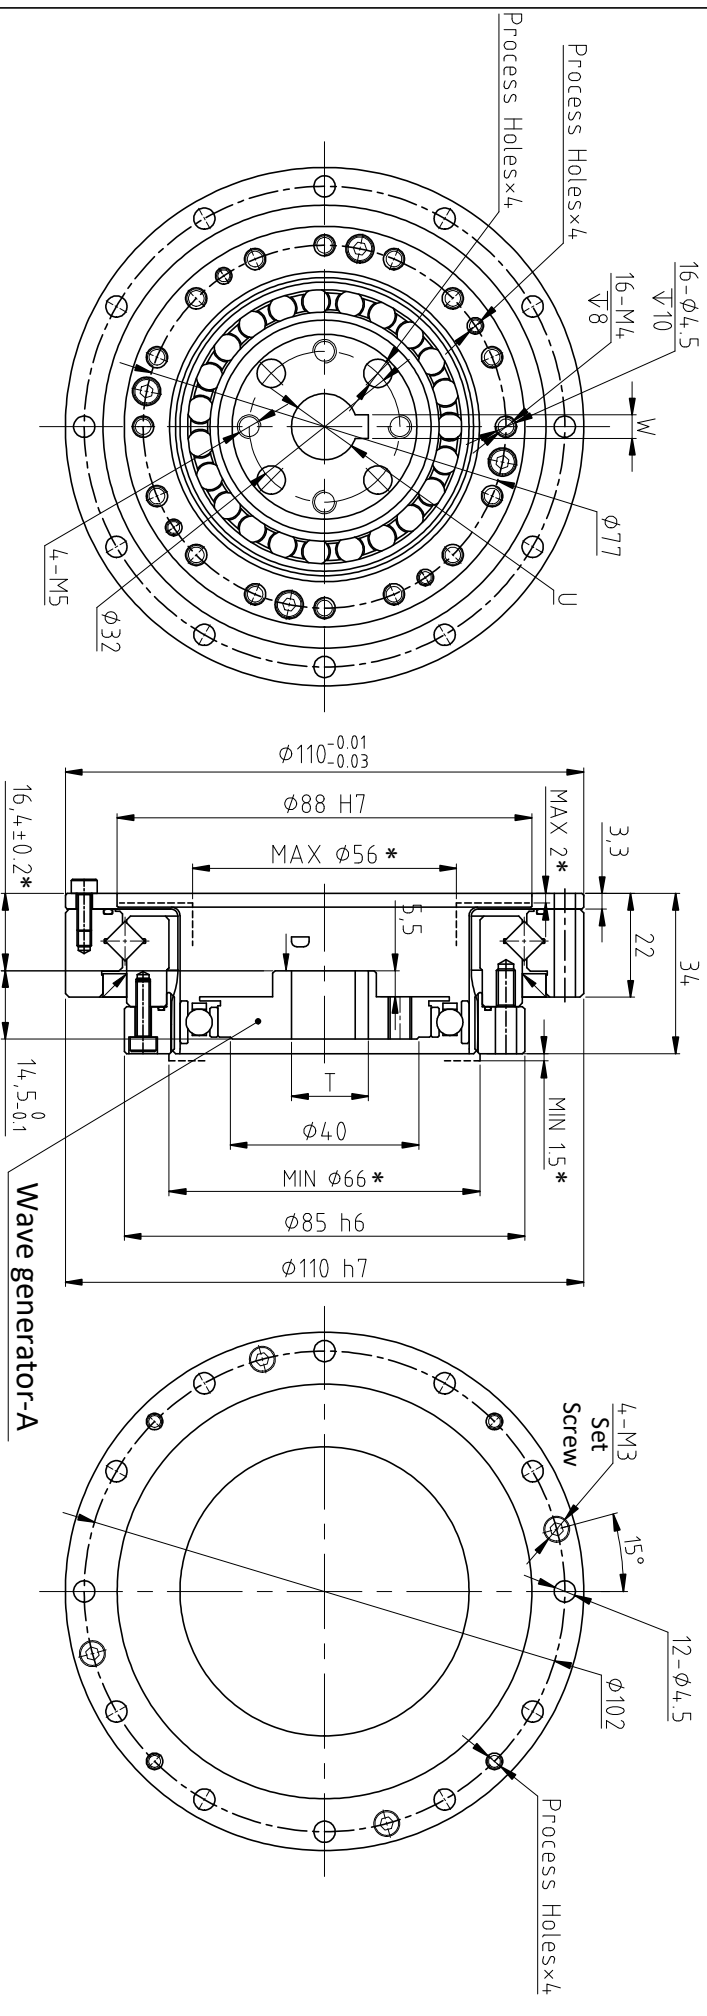

- Technical requirements:**
1. Please use the grease specified by our company
 2. The * in the drawing is the installation reference size, please follow the installation size requirements.
 3. If the product performance parameters are not specified, please refer to the latest catalog of our company for the standard values.



FHG-25-XX-U-I												Model		Reduction ratio		Rated torque at2000r/min input		Permissible peak torque at start and stop		Permissible maximum value for average load torque		Permissible maximum momentary torque		Permissible maximum input rotational speed		Permissible average input rotational speed		Backlash		weight		Desian life					
MODEL				U		T		W		25																											
Wave generator-A φ11				φ11H7		12.8 ^{±1}		4JS9/P9		50		51		5.2		127		13		72		7.3		242		25		5600		3500		≤20		FHG-I:1.22		≥10000	
										80		82		8.4		178		18		113		12		332		34		5600		3500		≤20					
										100		87		8.9		207		21		140		14		369		38		5600		3500		≤20					
										120		87		8.9		217		22		140		14		395		40		5600		3500		≤20					
										160		87		8.9		229		23		140		14		408		42		5600		3500		≤20					
Wave generator-A φ14				φ14H7		16.3 ^{±1}		5JS9/P9		50		51		5.2		127		13		72		7.3		242		25		5600		3500		≤20		≥15000			
										80		82		8.4		178		18		113		12		332		34		5600		3500		≤20		≥15000			
										100		87		8.9		207		21		140		14		369		38		5600		3500		≤20		≥15000			
										120		87		8.9		217		22		140		14		395		40		5600		3500		≤20		≥15000			
										160		87		8.9		229		23		140		14		408		42		5600		3500		≤20		≥15000			

Laifuai