

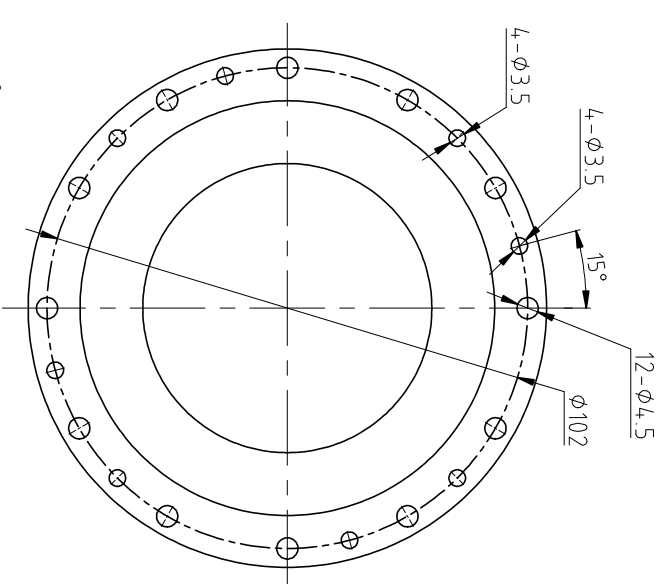
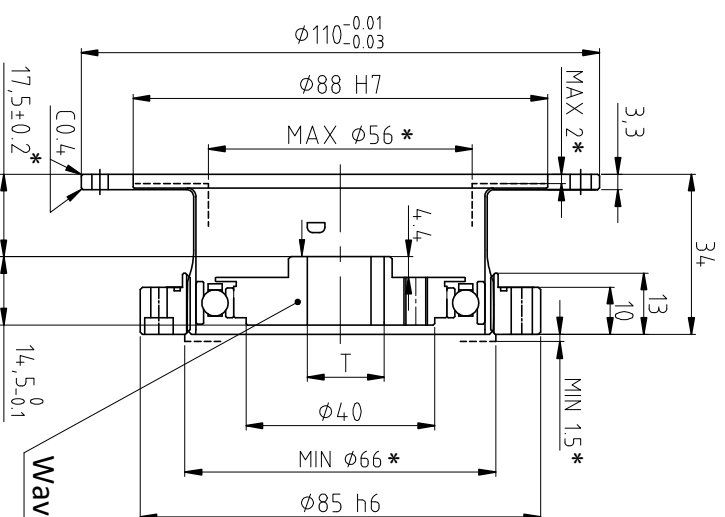


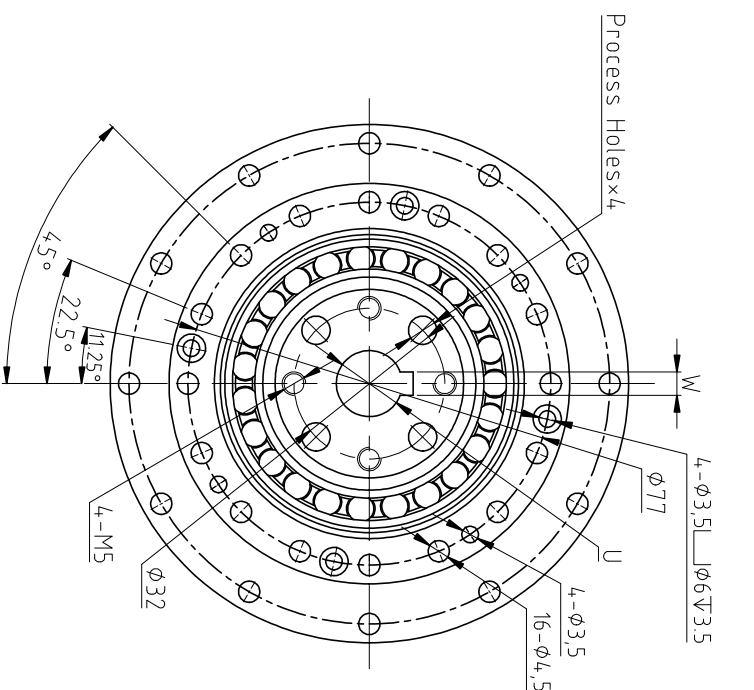

Wave generator-A

D Direction



- Technical requirements:**
1. Please use the grease specified by our company
 2. The * in the drawing is the installation reference size, please follow the installation size requirements.
 3. If the product performance parameters are not specified, please refer to the latest catalog of our company for the standard values.

Laifuai

FHT-25-XX-C-I				Model		Reduction ratio		Rated torque at 2000r/min input		Permissible peak torque at start and stop		Permissible maximum value for average load torque		Permissible maximum momentary torque		Permissible maximum input rotational speed		Permissible average input rotational speed		Backlash	weight	Desian life
MODEL	U	T	W					Nm	kgfm	Nm	kgfm	Nm	kgfm	Nm	kgfm	r/min	r/min	r/min	r/min	Arc Sec	kg	Hour
								50	39	4	98	10	55	186	19	5600	3500	3500	3500	≤20		
								80	63	6.4	137	14	87	255	26	5600	3500	3500	3500	≤20		
Wave generator-A $\phi 11$	$\phi 11$ H7	12.8 $\frac{+0.1}{-0.1}$	4JS9/P9					100	67	6.8	157	16	108	284	29	5600	3500	3500	3500	≤20	FHT-C:0.46	
								120	67	6.8	167	17	108	304	31	5600	3500	3500	3500	≤20		
Wave generator-A $\phi 14$	$\phi 14$ H7	16.3 $\frac{+0.1}{-0.1}$	5JS9/P9					160	67	6.8	176	18	108	314	32	5600	3500	3500	3500	≤20		