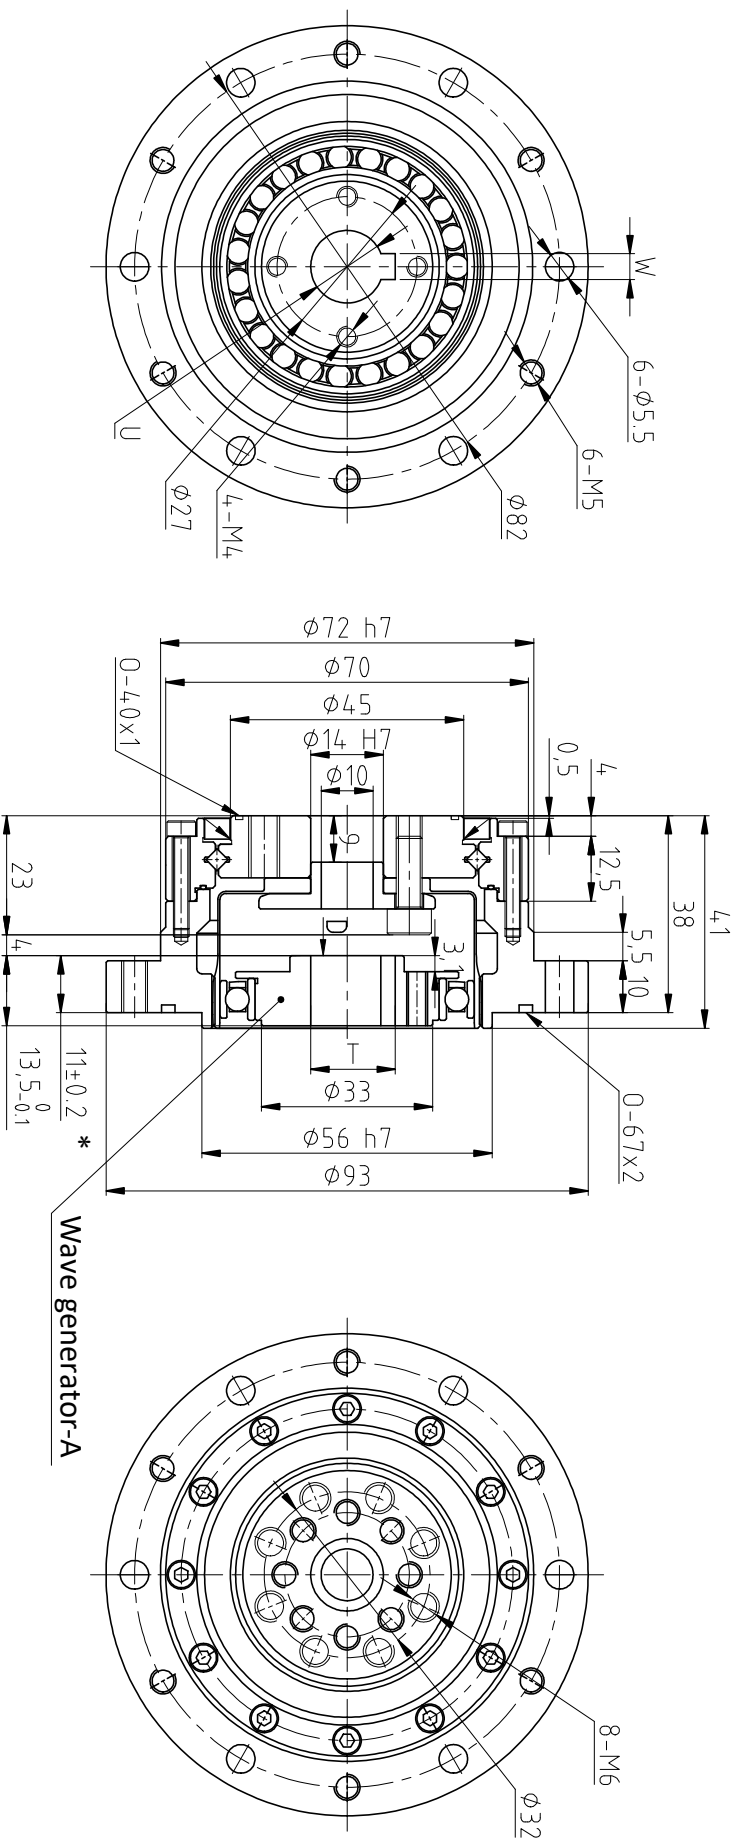


- Technical requirements:
1. Please use the grease specified by our company
 2. The * in the drawing is the installation reference size, please follow the installation size requirements.
 3. If the product performance parameters are not specified, please refer to the latest catalog of our company for the standard values.

Laiifuai

FSF-20-XX-U-I										Model		Reduction ratio		Rated torque at 2000r/min input		Permissible peak torque at start and stop		Permissible maximum value for average load torque		Permissible maximum momentary torque		Permissible maximum input rotational speed		Permissible average input rotational speed		Backlash		weight		Desian life											
MODEL				U		T		W				Nm		kgfm		Nm		kgfm		Nm		kgfm		r/min		r/min		Arc Sec		kg		Hour									
Wave generator-A φ8				φ8H7		9.4 ^{±0.1}		3JS9/P9				50		25		2.5		56		5.7		34		3.5		98		10				6500		3500		≤20		≥10000			
Wave generator-A φ11				φ11H7		12.8 ^{±0.1}		4JS9/P9		20		80		34		3.5		74		7.5		47		4.8		127		13				6500		3500		≤20		FSF-1:0.96		≥15000	
Wave generator-A φ11				φ11H7		12.8 ^{±0.1}		4JS9/P9				100		40		4.1		82		8.4		49		5		147		15				6500		3500		≤20		≥15000			
Wave generator-A φ11				φ11H7		12.8 ^{±0.1}		4JS9/P9				120		40		4.1		87		8.9		49		5		147		15				6500		3500		≤20		≥15000			
Wave generator-A φ14				φ14H7		16.3 ^{±0.1}		5JS9/P9				160		40		4.1		92		9.4		49		5		147		15				6500		3500		≤20		≥15000			