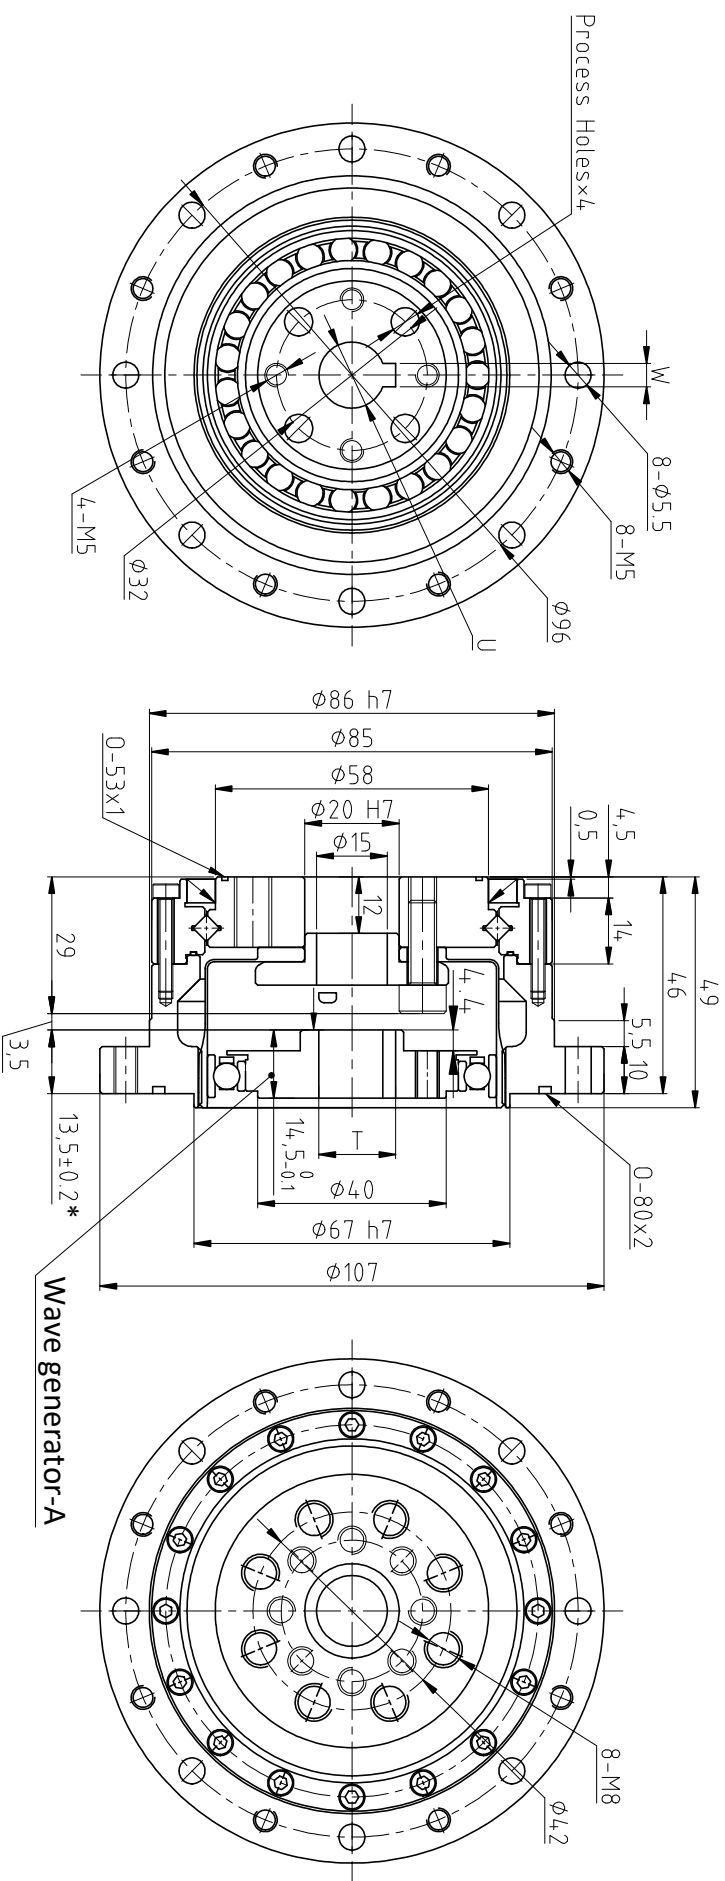


- Technical requirements:**
1. Please use the grease specified by our company
 2. The * in the drawing is the installation reference size, please follow the installation size requirements.
 3. If the product performance parameters are not specified, please refer to the latest catalog of our company for the standard values.

Laifuai

FSF-25-XX-U-I				Model		Reduction Ratio		Rated torque at 2000r/min input		Permissible peak torque at start and stop		Permissible maximum value for average load torque		Permissible maximum momentary torque		Permissible maximum input rotational speed		Permissible average input rotational speed		Backlash	weight	Desian life
MODEL	U	T	W					Nm	kgfm	Nm	kgfm	Nm	kgfm	Nm	kgfm	r/min		r/min		Arc Sec	kg	Hour
Wave generator-A $\phi 11$	$\phi 11H7$	$12.8^{+0.1}_{-0.1}$	4JS9/P9	25		50	39	4	98	10	55	5.6	186	19	5600	3500	3500	3500	≤ 20	FSF-I:1.46		≥ 15000
Wave generator-A $\phi 14$	$\phi 14H7$	$16.3^{+0.1}_{-0.1}$	5JS9/P9			80	63	6.4	137	14	87	8.9	255	26	5600	3500	3500	3500	≤ 20			≥ 15000
						100	67	6.8	157	16	108	11	284	29	5600	3500	3500	3500	≤ 20			≥ 15000
						120	67	6.8	167	17	108	11	304	31	5600	3500	3500	3500	≤ 20			≥ 15000
						160	67	6.8	176	18	108	11	314	32	5600	3500	3500	3500	≤ 20			≥ 15000