

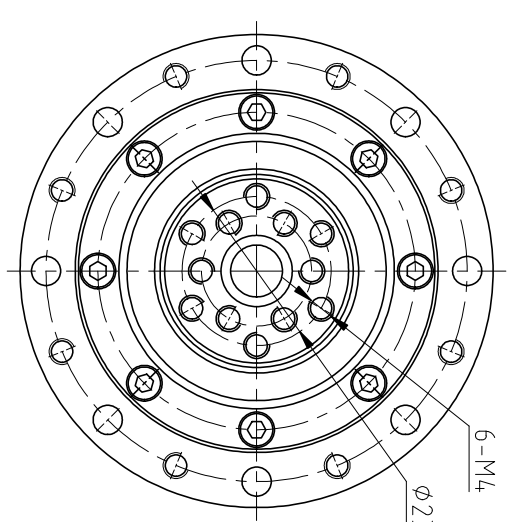
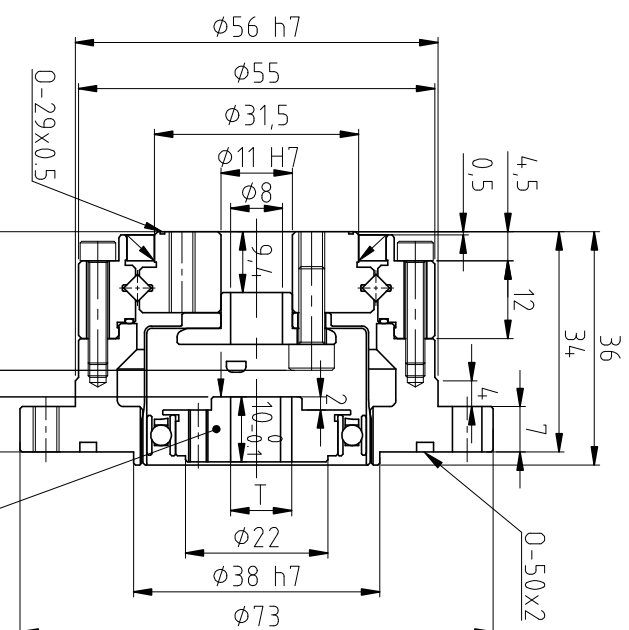


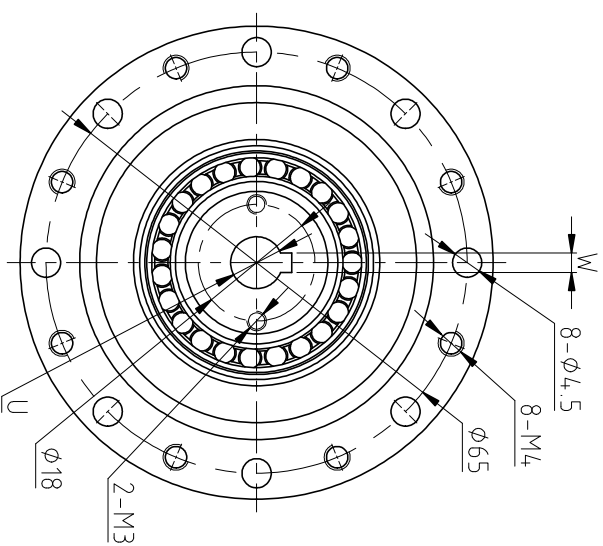

Wave generator-A



D Direction



4,1(Wave generator-A)
2,1(Wave generator-B)

8,5±0,2* (Wave generator-A)
10,5±0,2* (Wave generator-B)

Wave generator-B

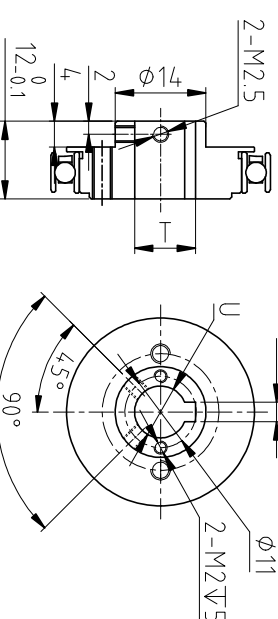

- Technical requirements:
1. Please use the grease specified by our company
 2. The * in the drawing is the installation reference size, please follow the installation size requirements.
 3. If the product performance parameters are not specified, please refer to the latest catalog of our company for the standard values.

FSG-14-XX-U-I

MODEL	U	T	W	Model	Reduction ratio	Rated torque at 2000r/min input	Permissible peak torque at start and stop	Permissible maximum value for average load torque	Permissible maximum momentary torque	Permissible maximum input rotational speed	Permissible average input rotational speed	Backlash	Weight	Design life
Wave generator-A/B φ6	φ6H7	7 ⁰ / ₁	2JS9/P9	14	50	7 Nm	23 Nm	9 Nm	46 Nm	8500 r/min	3500 r/min	≤20 Arc Sec	kg	≥10000 Hour
Wave generator-A/B φ8	φ8H7	9,4 ⁰ / ₁	3JS9/P9	14	80	10 Nm	30 Nm	14 Nm	58 Nm	8500 r/min	3500 r/min	≤20 Arc Sec	FSG-I:0.51	≥15000 Hour
					100	10 Nm	30 Nm	14 Nm	58 Nm	8500 r/min	3500 r/min	≤20 Arc Sec		≥15000 Hour

Laitival