
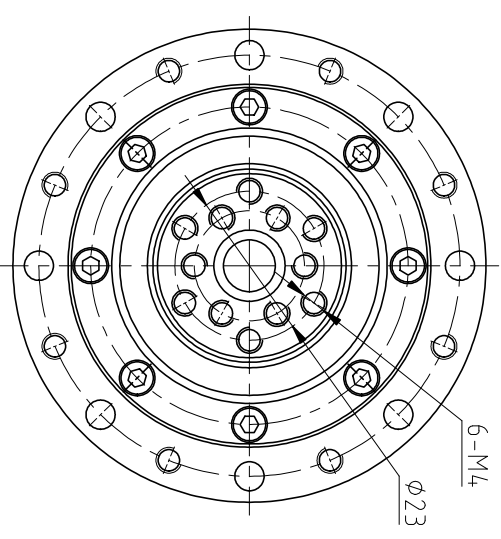
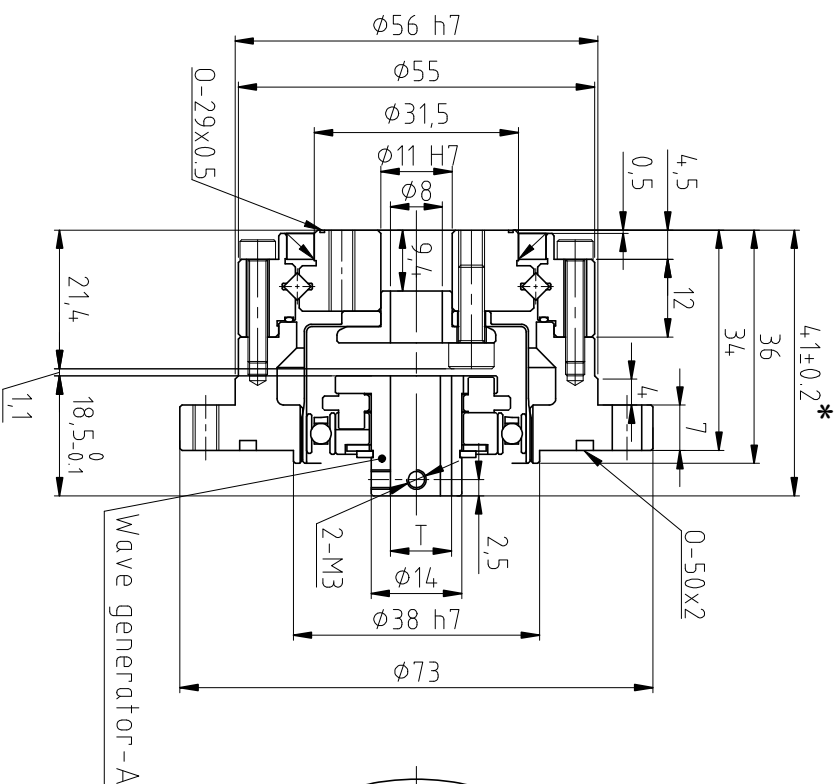


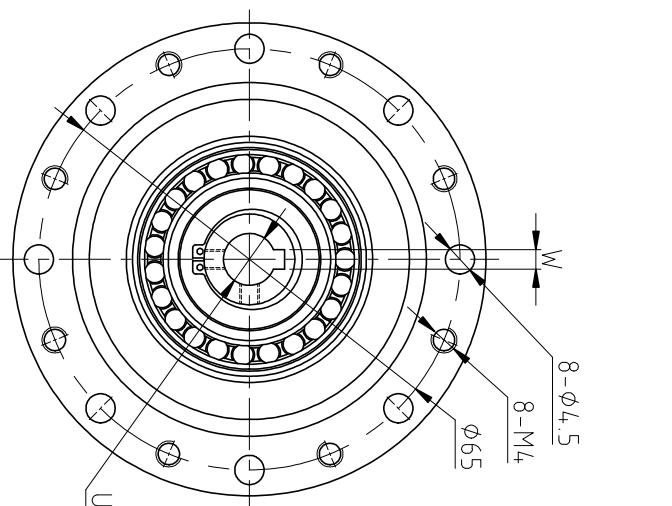

- Technical requirements:
1. Please use the grease specified by our company
 2. The * in the drawing is the installation reference size, please follow the installation size requirements.
 3. If the product performance parameters are not specified, please refer to the latest catalog of our company for the standard values.

FSG-14-XX-U-II

MODEL	U	T	W																							
				Model		Rated torque at 2000r/min input		Permissible peak torque at start and stop		Permissible maximum value for average load torque		Permissible maximum momentary torque		Permissible maximum input rotational speed		Permissible average input rotational speed		Backlash		Weight		Design life				
Wave generator-A $\phi 6$	$\phi 6H7$			Reduction ratio	Nm		kgfm		Nm		kgfm		Nm		kgfm		r/min		r/min		Arc Sec		kg		Hour	
					50	7	0.7	23	2.3	9	0.9	46	4.7	8500	3500	≤ 20										
					80	10	1	30	3.1	14	1.4	58	5.9	8500	3500	≤ 20										
Wave generator-A $\phi 8$	$\phi 8H7$	$9.4^{+0.1}_{-0}$	3JS9/P9	14	100	10	1	36	3.7	14	1.4	58	5.9	8500	3500	≤ 20										

Laitival