


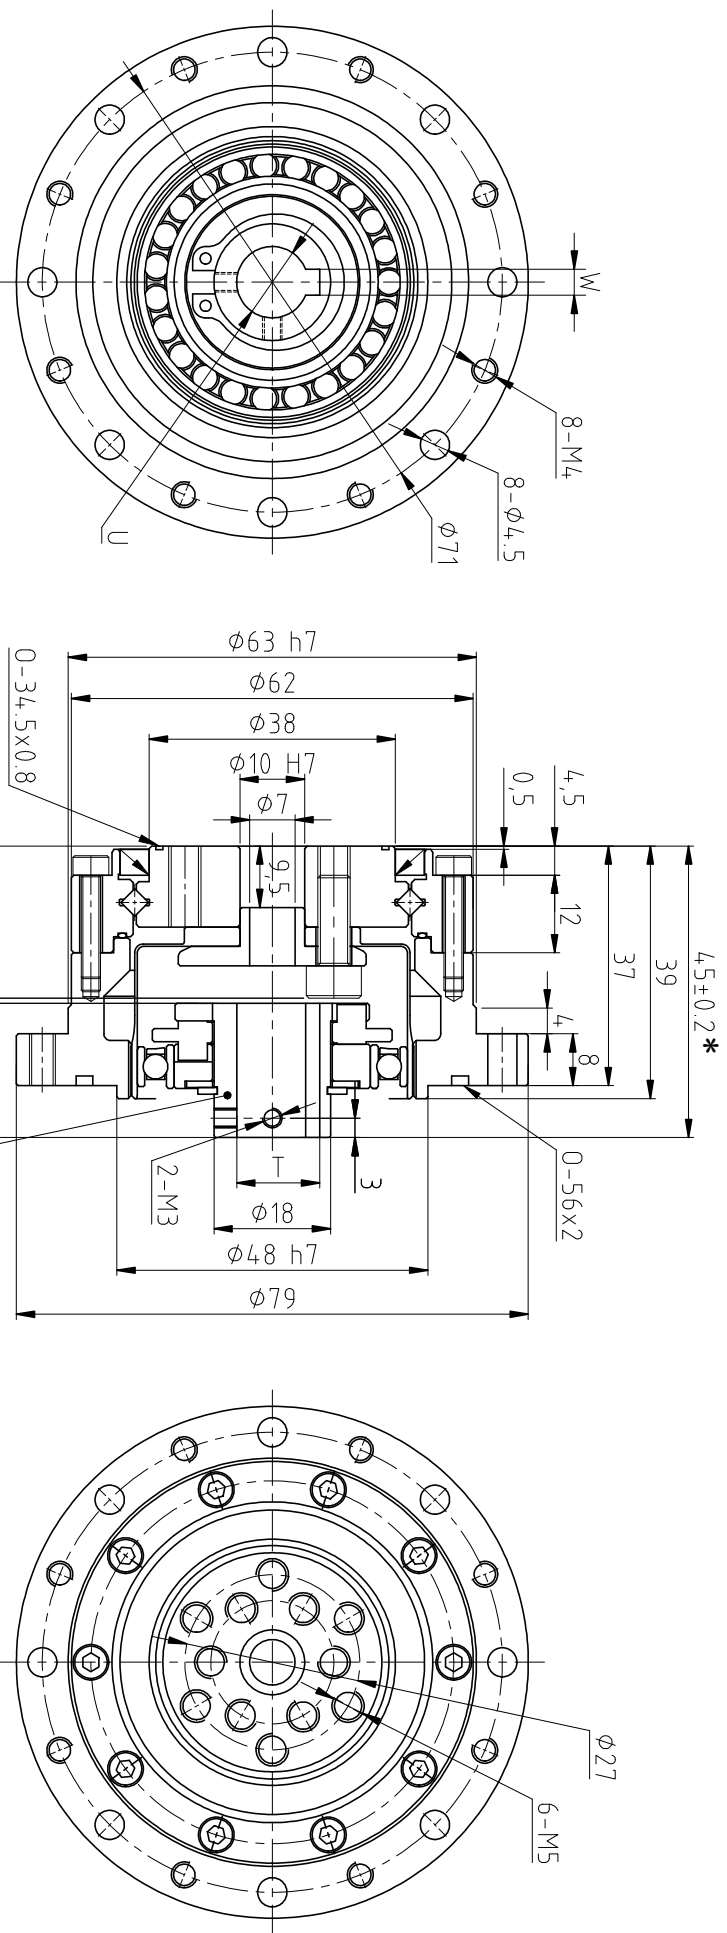

- Technical requirements:
1. Please use the grease specified by our company
 2. The * in the drawing is the installation reference size, please follow the installation size requirements.
 3. If the product performance parameters are not specified, please refer to the latest catalog of our company for the standard values.

FSG-17-XX-U-11																
MODEL	U	T	W													
Wave generator-A ø8	ø8H7															
Wave generator-A ø8	ø8H7	9.4 ^{+0.1}	3JS9/P9													
Wave generator-A ø11	ø11H7	12.8 ^{+0.1}	4JS9/P9													

Model	Reduction ratio	Rated torque at2000r/min input		Permissible peak torque at start and stop		Permissible maximum value for average load torque		Permissible maximum momentary torque		Permissible maximum input rotational speed	Permissible average input rotational speed	Backlash	weight	Desian life
		Nm	kgfm	Nm	kgfm	Nm	kgfm	Nm	kgfm					
17	50	21	2.1	44	4.5	34	3.4	91	9	7300	3500	≤20		Hour
	80	29	2.9	56	5.8	35	3.6	109	11	7300	3500	≤20	FSG-11:0.67	≥15000
	100	31	3.2	70	7.2	51	5.2	109	11	7300	3500	≤20		≥15000
	120	31	3.2	70	7.2	51	5.2	109	11	7300	3500	≤20		≥15000

Latituaal

Laifual