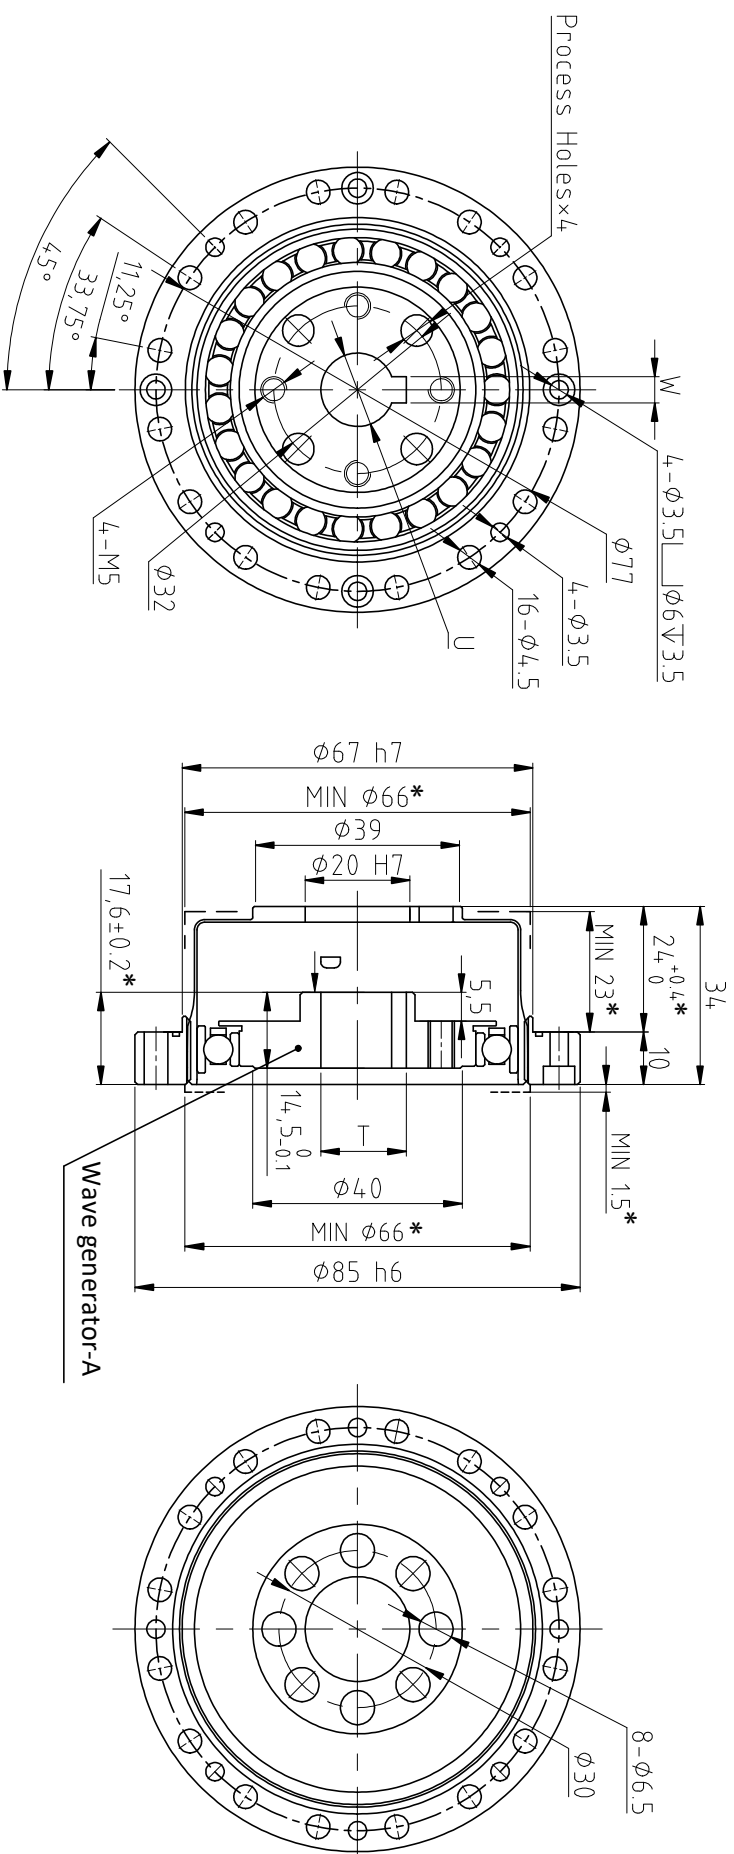


- Technical requirements:**
1. Please use the grease specified by our company
 2. The * in the drawing is the installation reference size, please follow the installation size requirements.
 3. If the product performance parameters are not specified, please refer to the latest catalog of our company for the standard values.

Laifunai

FSG-25-XX-C-I				Model	Reduction ratio	Rated torque at2000r/min Input		Permissible peak torque at start and stop		Permissible maximum value for average load torque		Permissible maximum momentary torque		Permissible maximum input rotational speed		Permissible average input rotational speed		Backlash	weight	Desian life	
MODEL	U	T	W			Nm	kgfm	Nm	kgfm	Nm	kgfm	Nm	kgfm	r/min	r/min	Arc Sec	kg				Hour
Wave generator-A φ11	φ11H7	12.8 ^{±0.1}	4JS9/P9	25	50	51	5.2	127	13	72	7.3	242	25	5600	3500	≤20	≥10000				
					80	82	8.4	178	18	113	12	332	34	5600	3500	≤20	≥15000				
					100	87	8.9	204	21	140	14	369	38	5600	3500	≤20	≥15000				
					120	87	8.9	217	22	140	14	395	40	5600	3500	≤20	≥15000				
Wave generator-A φ14	φ14H7	16.3 ^{±0.1}	5JS9/P9		160	87	8.9	229	23	140	14	408	42	5600	3500	≤20	≥15000				