



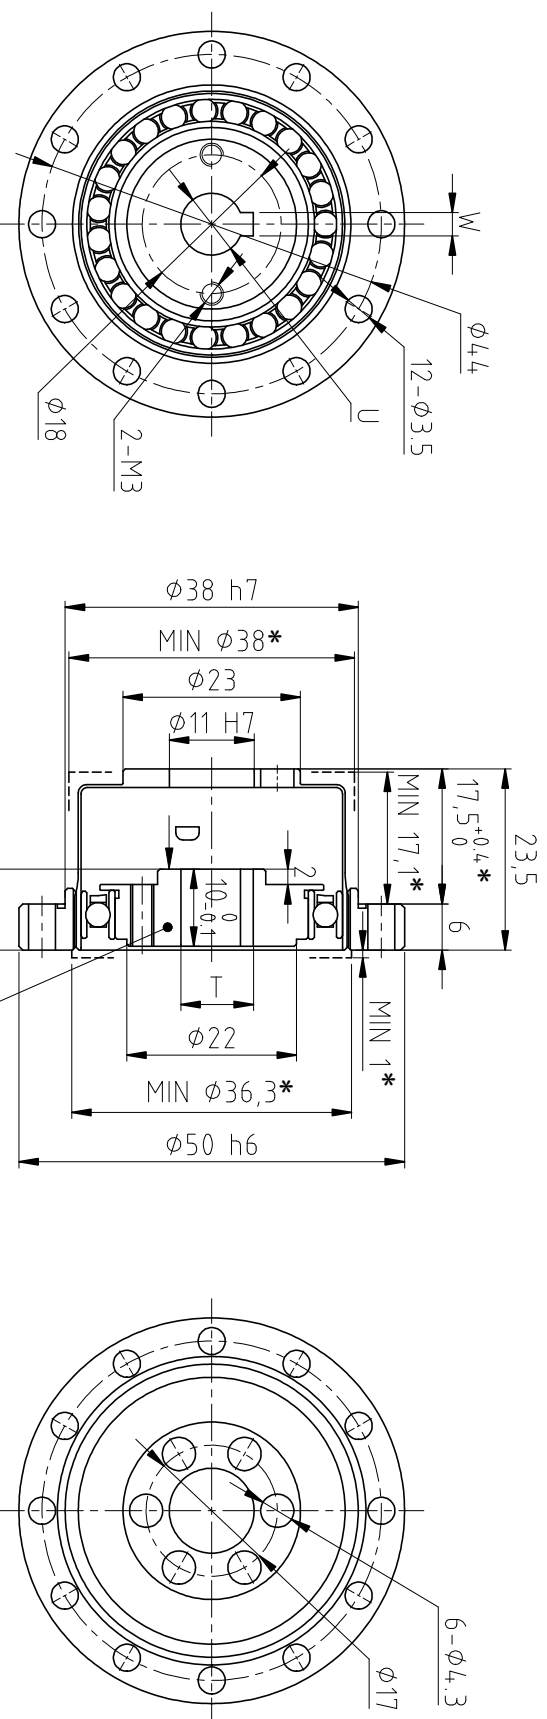


10,5±0.2* (Wave generator-A)
12.5±0.2* (Wave generator-B)

Wave generator-A

D Direction

Wave generator-B

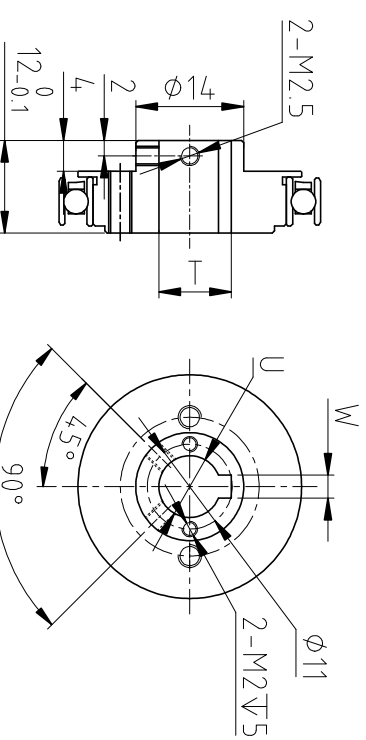

- Technical requirements:
1. Please use the grease specified by our company
 2. The * in the drawing is the installation reference size, please follow the installation size requirements.
 3. If the product performance parameters are not specified, please refer to the latest catalog of our company for the standard values.

FSS-14-XX-C-I

MODEL	U	T	W	Model	Reduction ratio	Rated torque at 2000r/min input		Permissible peak torque at start and stop		Permissible maximum value for average load torque		Permissible maximum momentary torque		Permissible maximum input rotational speed		Permissible average input rotational speed		Backlash	Weight	Design life
						Nm	kgfm	Nm	kgfm	Nm	kgfm	Nm	kgfm	r/min		r/min		Arc Sec	kg	Hour
Wave generator-A/B φ6	φ6H7	7 ⁰ ₁	2JS9/P9	14	50	5.4	0.55	18	1.8	6.9	0.7	35	3.6	8500		3500		≤20	FSS-C:0.09	≥10000
					80	7.8	0.8	23	2.4	11	1.1	47	4.8	8500		3500		≤20		≥15000
Wave generator-A/B φ8	φ8H7	9.4 ⁰ ₁	3JS9/P9		100	7.8	0.8	28	2.9	11	1.1	54	5.5	8500		3500		≤20		≥15000

Laitival