



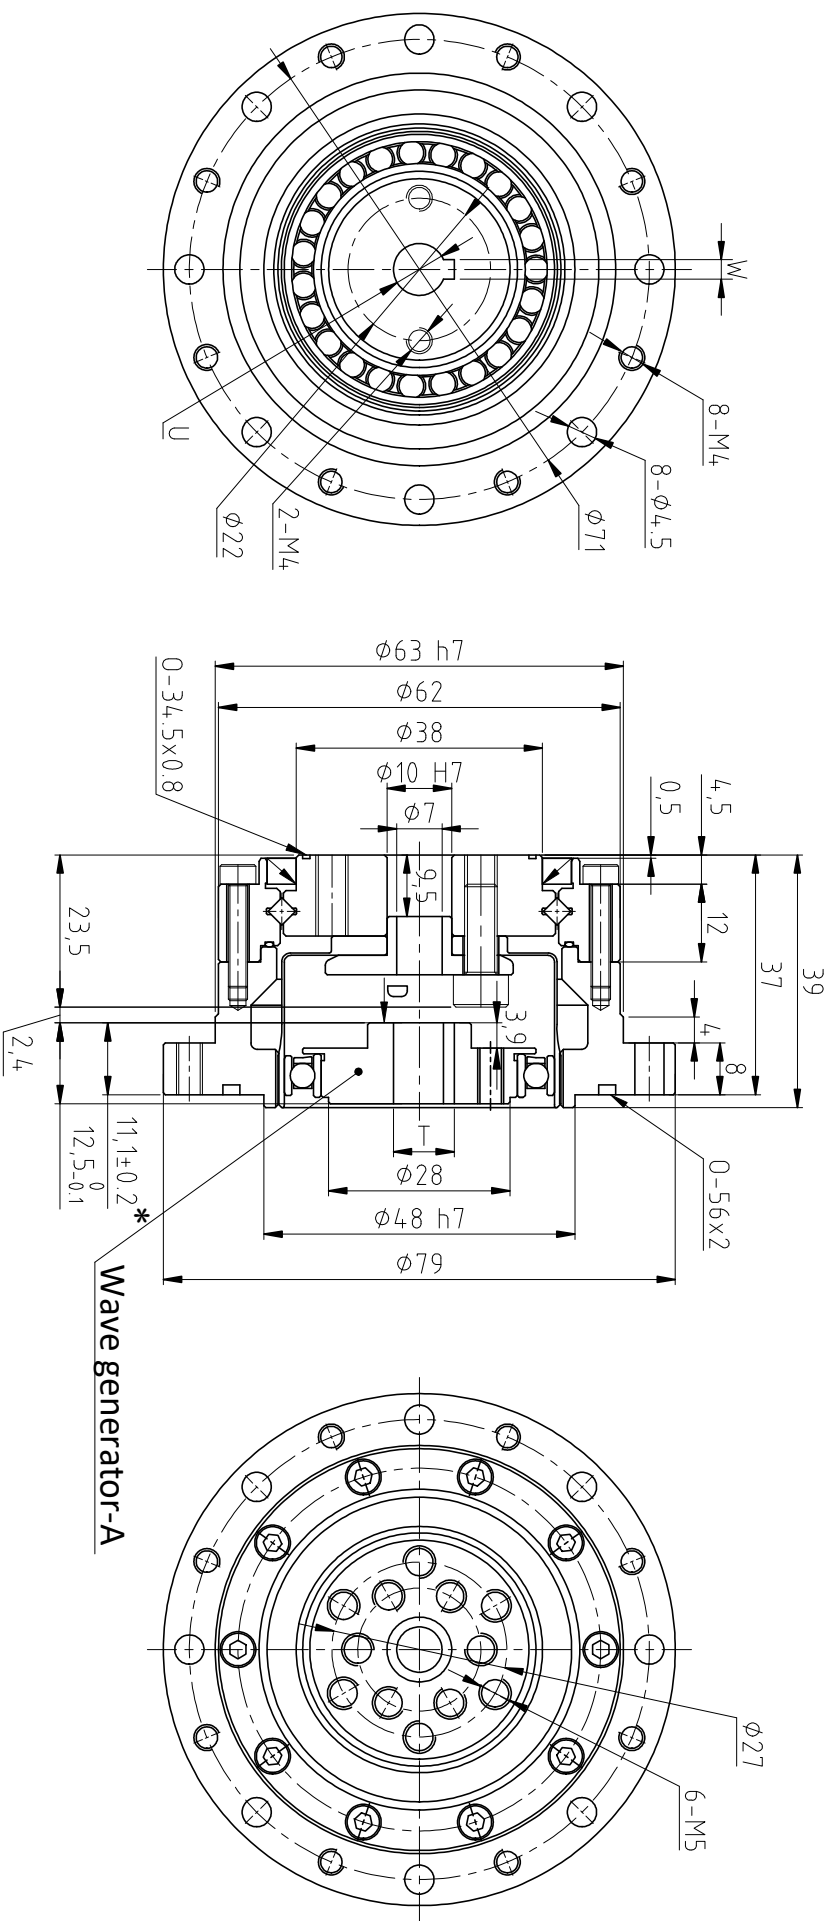

D Direction



- Technical requirements:**
1. Please use the grease specified by our company
 2. The * in the drawing is the installation reference size, please follow the installation size requirements.
 3. If the product performance parameters are not specified, please refer to the latest catalog of our company for the standard values.

FSS-17-XX-U-I																									
MODEL	U	T	W	Model		Reduction ratio		Rated to torque at2000r/min input		Permissible peak torque at start and stop		Permissible maximum value for average load torque		Permissible maximum momentary torque		Permissible maximum input rotational speed		Permissible average input rotational speed		Backlash		weight		Desian life	
Wave generator-A φ8	φ8H7	9.4 ^{±0.1}	3JS9/P9	17	50	16	1.6	34	3.5	26	2.6	70	7.1	7300	3500	≤20	FSS+0.67	kg	Hour						
					80	22	2.2	43	4.4	27	2.7	87	8.9	7300	3500	≤20									
					100	24	2.4	54	5.5	39	4	108	11	7300	3500	≤20									
					120	24	2.4	54	5.5	39	4	86	8.8	7300	3500	≤20									
Wave generator-A φ11	φ11H7	12.8 ^{±0.1}	4JS9/P9																						

Laifual