

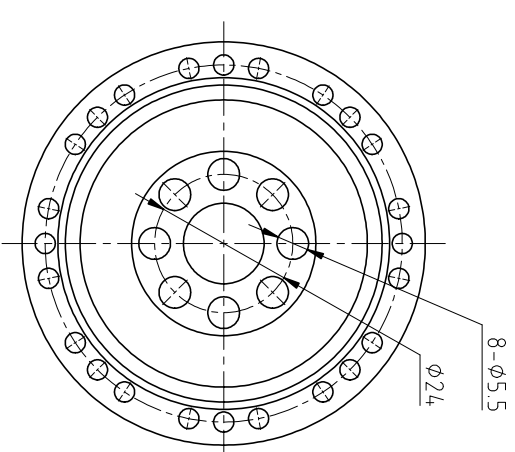
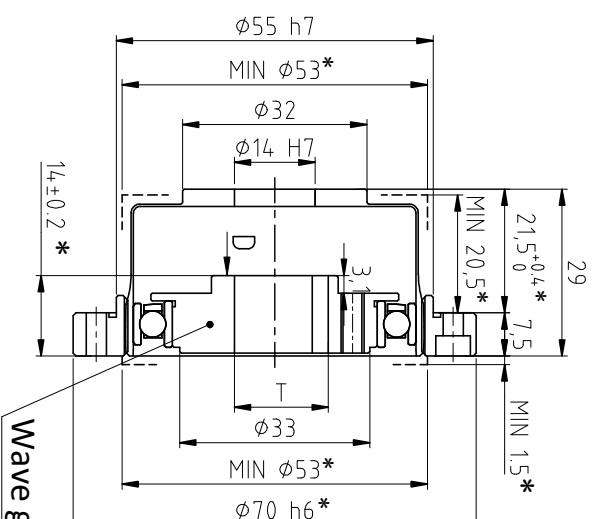


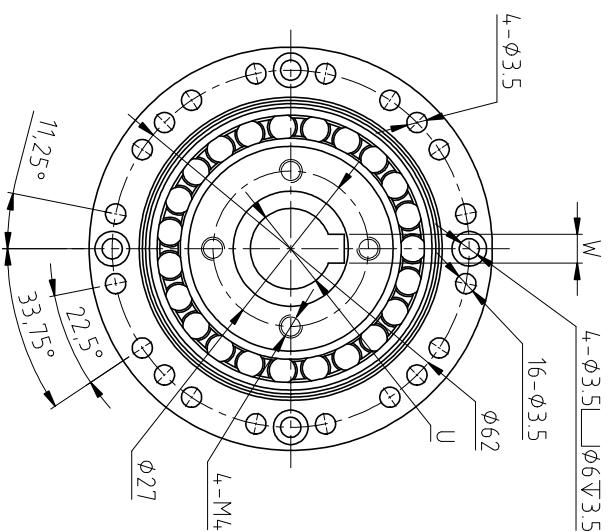

D Direction



- Technical requirements:**
1. Please use the grease specified by our company
 2. The * in the drawing is the installation reference size, please follow the installation size requirements.
 3. If the product performance parameters are not specified, please refer to the latest catalog of our company for the standard values.

FSS-20-XX-C-I				Model	Reduction ratio	Rated torque at2000r/min input		Permissible peak torque at start and stop		Permissible maximum value for average load torque		Permissible maximum momentary torque		Permissible maximum input rotational speed	Permissible average input rotational speed	Backlash	weight	Desian life					
MODEL	U	T	W			Nm	kgfm	Nm	kgfm	Nm	kgfm	Nm	kgfm						r/min	r/min	Arc Sec	kg	Hour
Wave generator-A φ8	φ8H7	9.4 ^{±1}	3JS9/P9	20	50	25	2.5	56	5.7	34	3.5	98	10	6500	3500	≤20		≥10000					
					80	34	3.5	74	7.5	47	4.8	127	13	6500	3500	≤20		≥15000					
Wave generator-A φ11	φ11H7	12.8 ^{±1}	4JS9/P9		100	40	4.1	82	8.4	49	5	147	15	6500	3500	≤20	FSS-C:0.28	≥15000					
					120	40	4.1	87	8.9	49	5	147	15	6500	3500	≤20		≥15000					
Wave generator-A φ14	φ14H7	16.3 ^{±1}	5JS9/P9		160	40	4.1	92	9.4	49	5	147	15	6500	3500	≤20		≥15000					

Laituai