

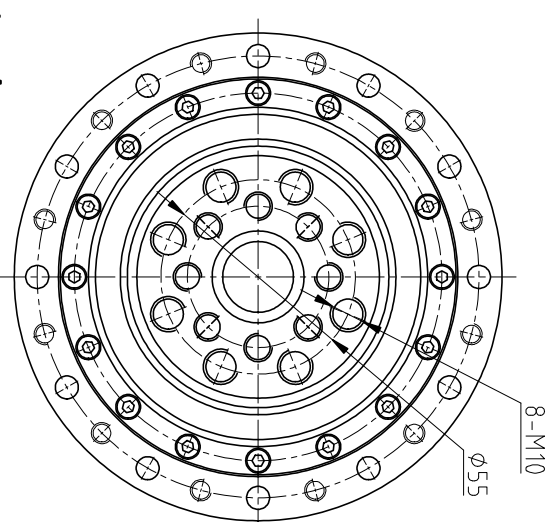
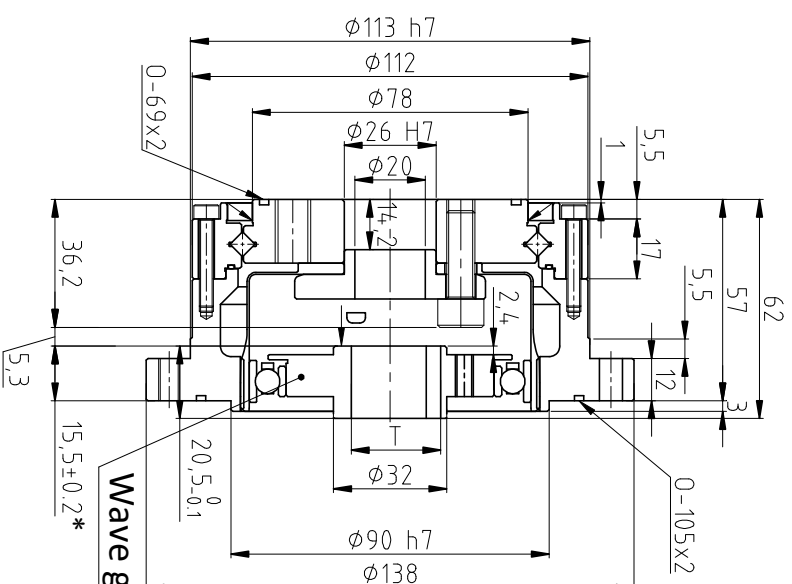


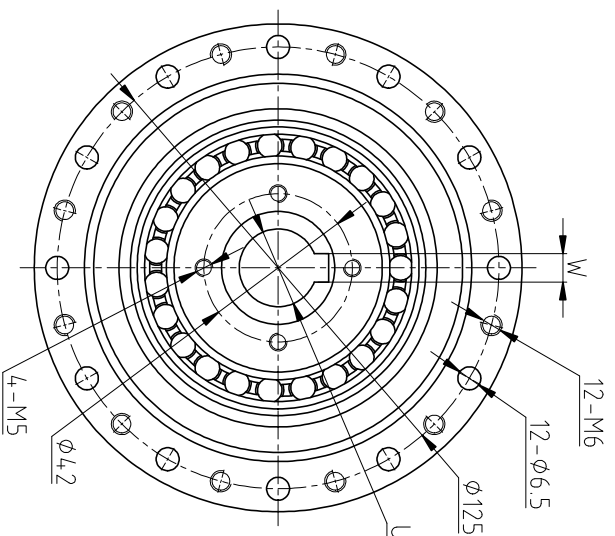

D Direction



Wave generator-A

- Technical requirements:
1. Please use the grease specified by our company
 2. The * in the drawing is the installation reference size, please follow the installation size requirements.
 3. If the product performance parameters are not specified, please refer to the latest catalog of our company for the standard values.

FSS-32-XX-U-I-LF

FSS-32-XX-U-I-LF																				
MODEL		U	T	W																
Wave generator-A Ø14	Ø14H7	16.3 ⁺⁰ _{-0.1}	5JS9/P9	Model	Reduction ratio	Rated torque at2000r/min input		Permissible peak torque at start and stop		Permissible maximum value for average load torque		Permissible maximum momentary torque		Permissible maximum input rotational speed		Permissible average input rotational speed		Backlash	weight	Desian life
						Nm	kgfm	Nm	kgfm	Nm	kgfm	Nm	kgfm	r/min	r/min	Arc Sec	kg			
Wave generator-A Ø19	Ø19H7	21.8 ⁺⁰ _{-0.1}	6JS9/P9	32	50	76	7.8	216	22	108	11	382	39	4800	3500	≤20	≥15000			
					80	118	12	304	31	167	17	568	58	4800	3500	≤20	≥15000			
					100	137	14	333	34	261	22	647	66	4800	3500	≤20	≥15000			
					120	137	14	353	36	261	22	686	70	4800	3500	≤20	≥15000			
Wave generator-A Ø22	Ø22H7	25.3 ⁺⁰ _{-0.1}	8JS9/P9	32	160	137	14	372	38	261	22	686	70	4800	3500	≤20	≥15000			

Laitual