


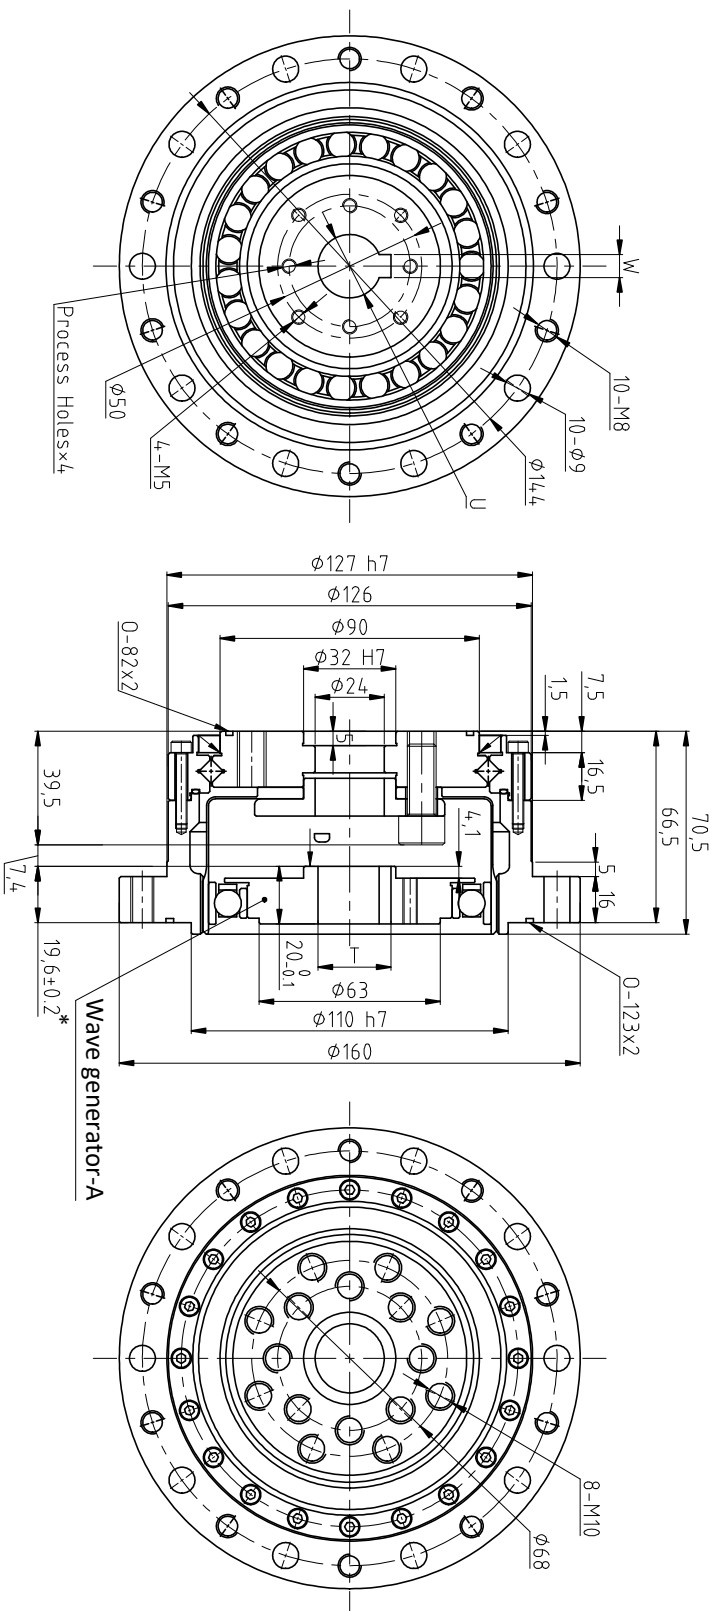

- Technical requirements:**
1. Please use the grease specified by our company
 2. The * in the drawing is the installation reference size, please follow the installation size requirements.
 3. If the product performance parameters are not specified, please refer to the latest catalog of our company for the standard values.

FSS-40-XX-U-I

FSS-40-XX-U-I																		
MODEL		U	T	W														
Wave generator-A φ14	φ14H7	16.3 ^{±1}	5JS9/P9		Model	Reduction ratio	Rated torque at2000r/min input	Permissible peak torque at start and stop	Permissible maximum value for average load torque	Permissible maximum momentary torque	Permissible maximum input rotational speed	Permissible average input rotational speed	Backlash	weight	Desian life			
Wave generator-A φ19	φ19H7	21.8 ^{±1}	6JS9/P9	40		50	Nm 137 kgfm 14	Nm 402 kgfm 41	Nm 196 kgfm 20	Nm 686 kgfm 70	4000	3500	≤20	kg	Hour			
					80	206	21	519	53	284	29	980	100	4000	3500	≤20		≥15000
					100	265	27	568	58	372	38	1080	110	4000	3500	≤20	FSS-I-4.6	≥15000
					120	294	30	617	63	451	46	1180	120	4000	3500	≤20		≥15000
					160	294	30	647	66	451	46	1180	120	4000	3500	≤20		≥15000
Wave generator-A φ22	φ22H7	25.3 ^{±1}	8JS9/P9															

Laifuai