


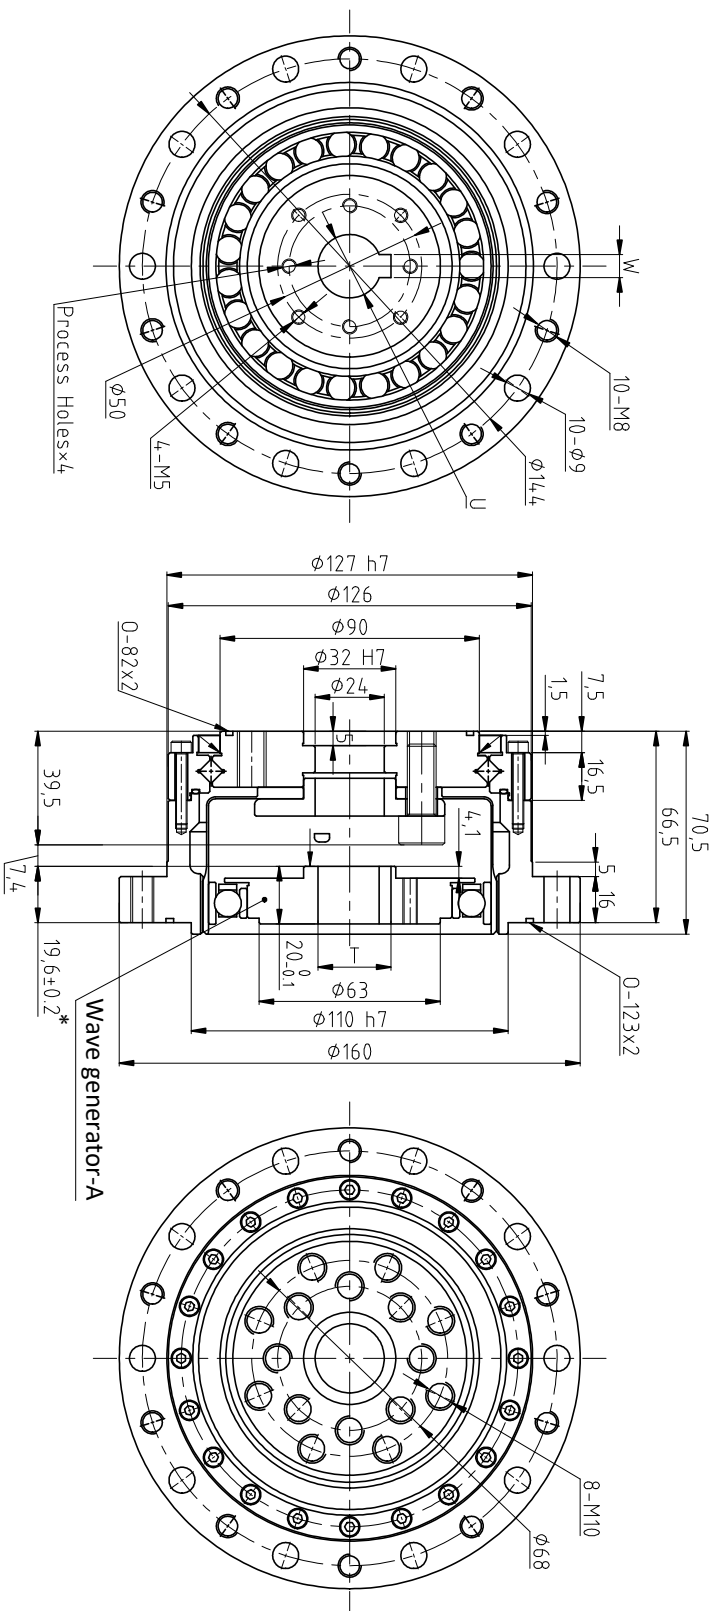

- Technical requirements:**
1. Please use the grease specified by our company
 2. The * in the drawing is the installation reference size, please follow the installation size requirements.
 3. If the product performance parameters are not specified, please refer to the latest catalog of our company for the standard values.

Latipual

FSN-40-XX-U-I																					
MODEL				U		T		W													
Wave generator-A φ14	Wave generator-A φ19	Wave generator-A φ22	Model	Reduction ratio	Rated torque at2000r/min Input		Permissible peak torque at start and stop		Permissible maximum value for average load torque		Permissible maximum momentary torque		Permissible maximum input rotational speed		Permissible average input rotational speed		Backlash	weight	Desian life		
					Nm	kgfm	Nm	kgfm	Nm	kgfm	Nm	kgfm	r/min	r/min	Arc Sec	kg				Hour	
					50	137	14	402	41	196	20	686	70	4000	3500	≤20					≥10000
					80	206	21	519	53	284	29	980	100	4000	3500	≤20					≥15000
					100	265	27	568	58	372	38	1080	110	4000	3500	≤20				FSN-I:3.64	≥15000
			40	120	294	30	617	63	451	46	1180	120	4000	3500	≤20		≥15000				
				160	294	30	647	66	451	46	1180	120	4000	3500	≤20		≥15000				