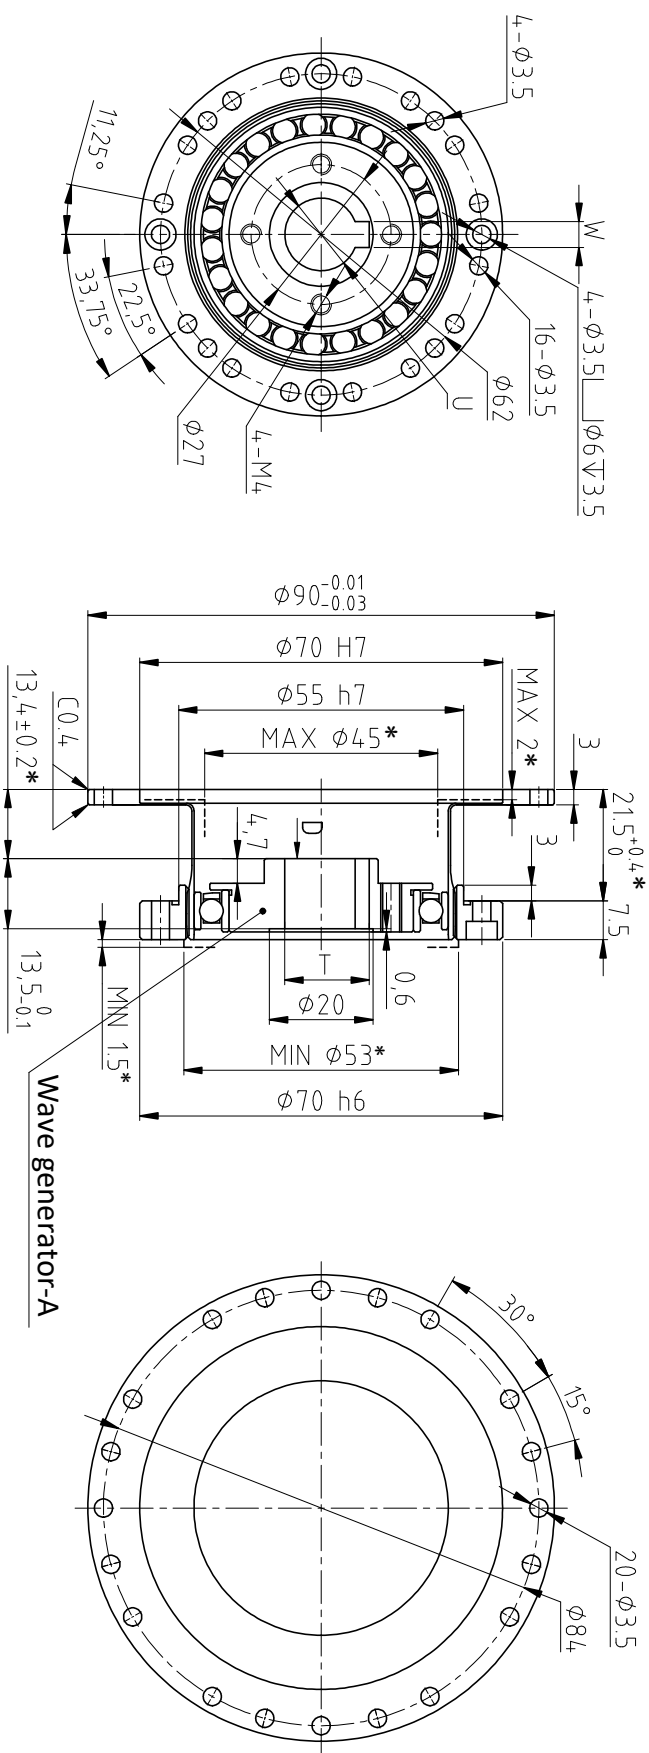


- Technical requirements:**
1. Please use the grease specified by our company
 2. The * in the drawing is the installation reference size, please follow the installation size requirements.
 3. If the product performance parameters are not specified, please refer to the latest catalog of our company for the standard values.

Laifuai

FHG-20-XX-C-I				Model		Reduction ratio		Rated torque at2000r/min input		Permissible peak torque at start and stop		Permissible maximum value for average load torque		Permissible maximum momentary torque		Permissible maximum input rotational speed		Permissible average input rotational speed		Backlash		weight		Desian life											
MODEL				U		T		W												Arc Sec		kg		Hour											
Wave generator-A φ8				φ8H7		9.4 ^{±1}		3JS9/P9																											
Wave generator-A φ11				φ11H7		12.8 ^{±1}		4JS9/P9																FHG-C:0.27											
Wave generator-A φ14				φ14H7		16.3 ^{±1}		5JS9/P9																											
										50		33		3.3		73		7.4		44		4.5		127		13		6500		3500		≤20		≥10000	
										80		44		4.5		96		9.8		61		6.2		165		17		6500		3500		≤20		≥15000	
										100		52		5.3		107		10.9		64		6.5		191		20		6500		3500		≤20		≥15000	
										120		52		5.3		113		11.5		64		6.5		191		20		6500		3500		≤20		≥15000	
										160		52		5.3		120		12.2		64		6.5		191		20		6500		3500		≤20		≥15000	